


# TUBE

DT-TBT8FU09 - 2Ft

## Introduction

580mm

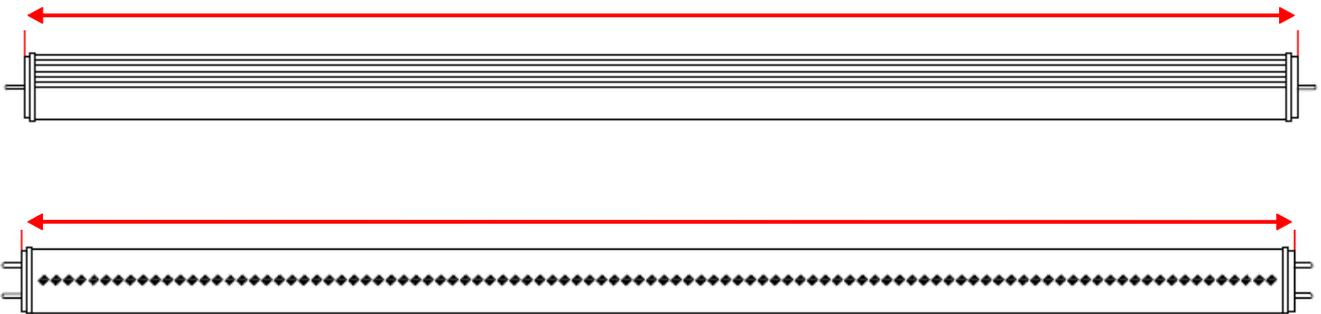

## Photo




## Features



- Good heat dissipation by aluminum alloy made heat sink
- Longer lumen flux length design with extra 20~70mm light bar, about 2~6% more compared to current product
- Meet traditional G13 socket
- Robust power driver with full range AC main (90~264 VAC)
- Using 60%~70% less electricity than traditional fluorescent tube
- ECO-Friendly. CO2 reduction, Mercury-free, No UV light
- Compliance with CE standard regulations
- Life Time @25°C (LED): > 30,000 hrs
- Power Factor: 0.9

## Specification

ITEM NO.	DT-TBT8FU09
Lumen Output (lm)	800-900 lm Max
LED Q'ty	LED * 91 pcs
Power Consumption (W)	9
Dimension (mm)	Φ30mm x 580 mm
6500/3000K Lux @1M	380/ 350 Lux
Input Voltage	AC 90 ~ 264V, 50 ~ 60 Hz
CRI	CW > 75 , WW > 80
Beam Angle	120° ± 10°
Lifetime	30,000 Hours
CCT (K) WW/ CW	3,200K± 300 K / 6500 K± 600 K

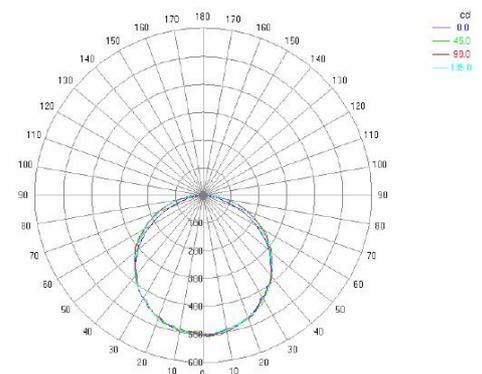

Beam angle: 120 deg